



			SV200		
Medium handled			Atmospheric air		
Suction temperature	°F		68		
Suction pressure, abs.	psia		14,504		
Drive speed	rpm		1 000	1 400	1 800
Discharge pressure	psig		15,0		
Discharge temperature	°F		229	231	247
Flow rate	cfm		50	76	102
Power at coupling	hp		5,5	8,1	11,1
Suction temperature, max.	°F		115	115	115
Discharge pressure	psig		25,0		
Discharge temperature	°F		299	290	306
Flow rate	cfm		42	67	93
Power at coupling	hp		7,3	10,1	14,0
Suction temperature, max.	°F		115	115	115
Discharge pressure	psig		36,0		
Discharge temperature	°F		375	356	372
Flow rate	cfm		32	58	83
Power at coupling	hp		9,3	12,4	17,2
Suction temperature, max.	°F		115	115	115
Dimensions	Length	inch	19,4		
Direct drive	Width	inch	9,1		
	Height	inch	9,6		
	Weight	lb	82		
Dimensions	Length	inch	21,5		
Hydraulic drive	Width	inch	9,1		
	Height	inch	9,6		
	Weight	lb	86		


Medium: air, 14.504 psia, 68 °F, relative humidity 60 %

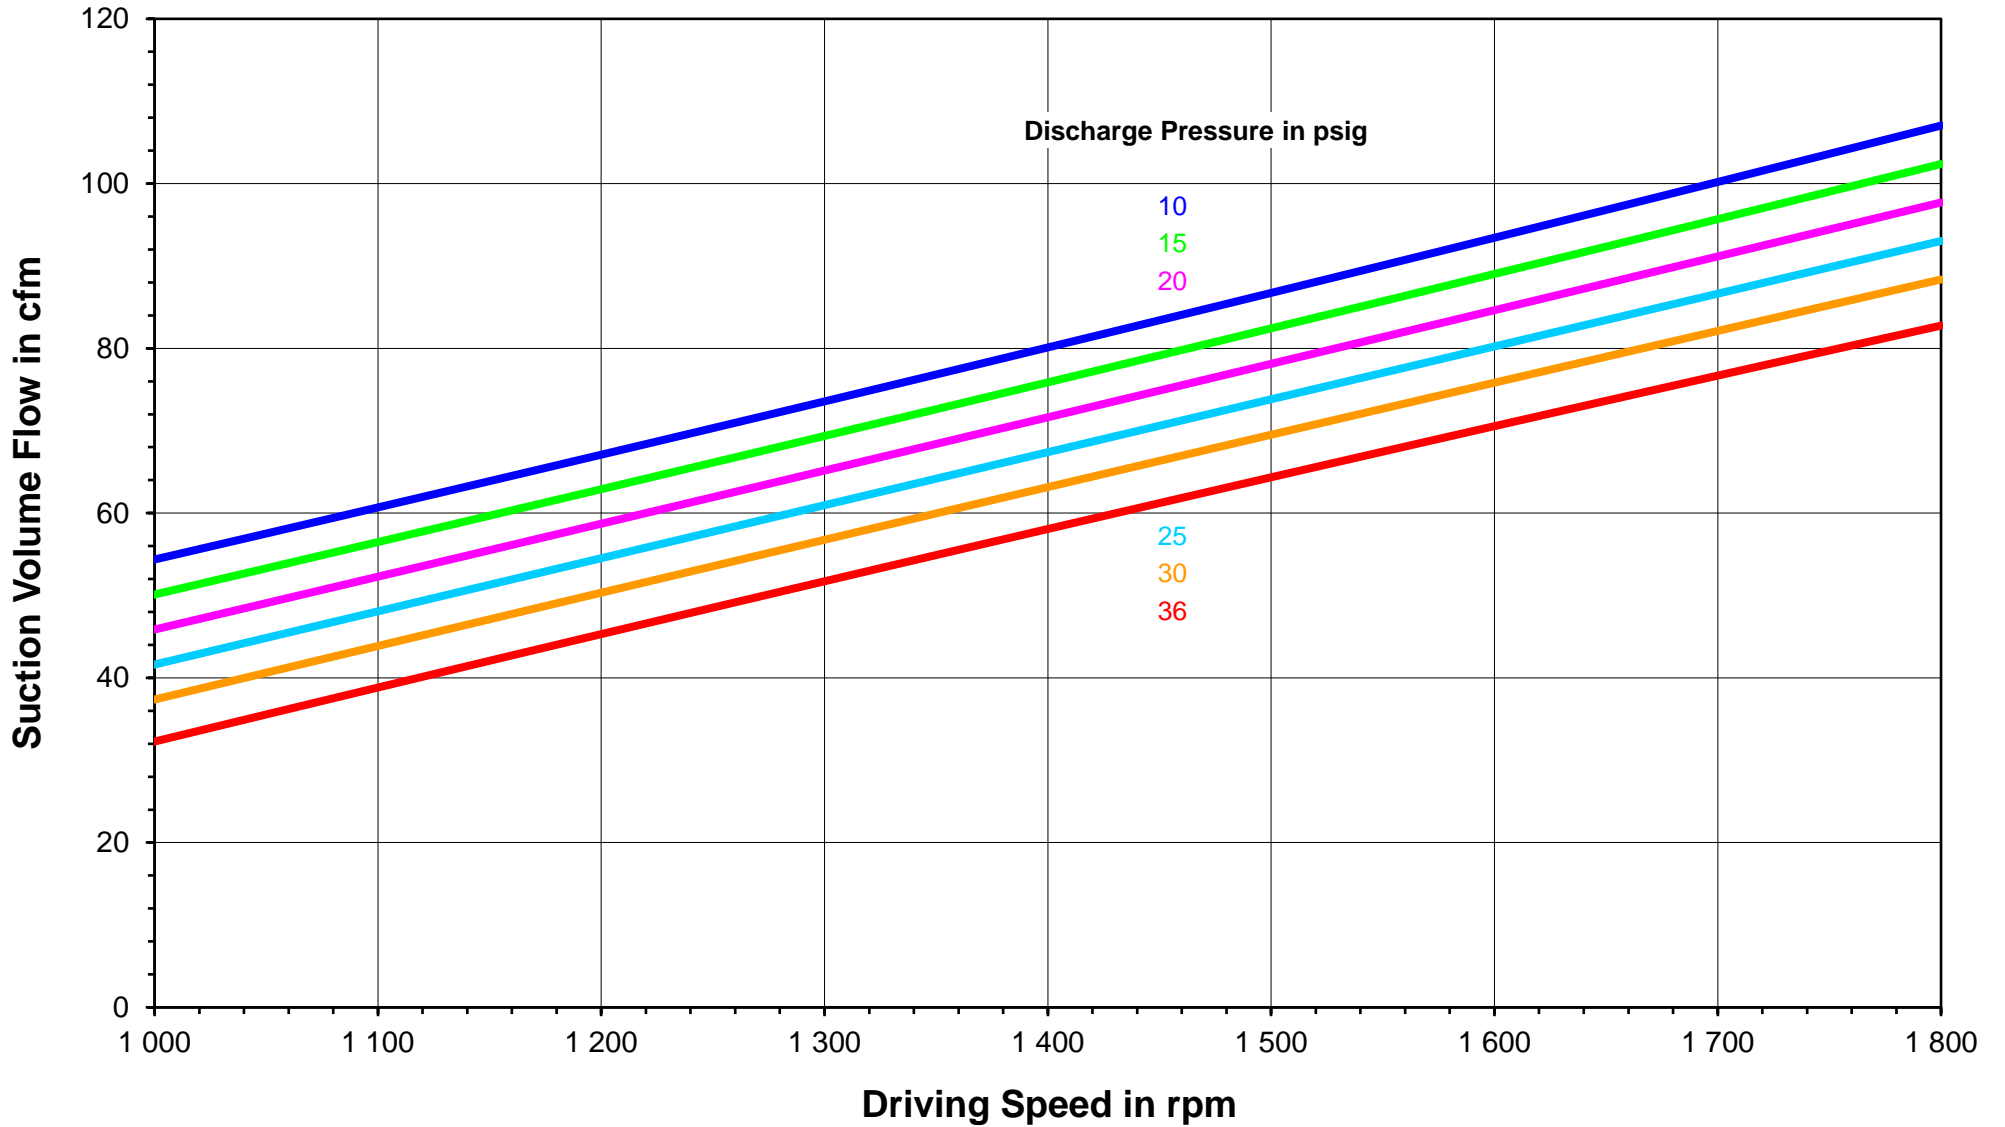


Medium: air, 14.504 psia, 68 °F, relative humidity 60 %

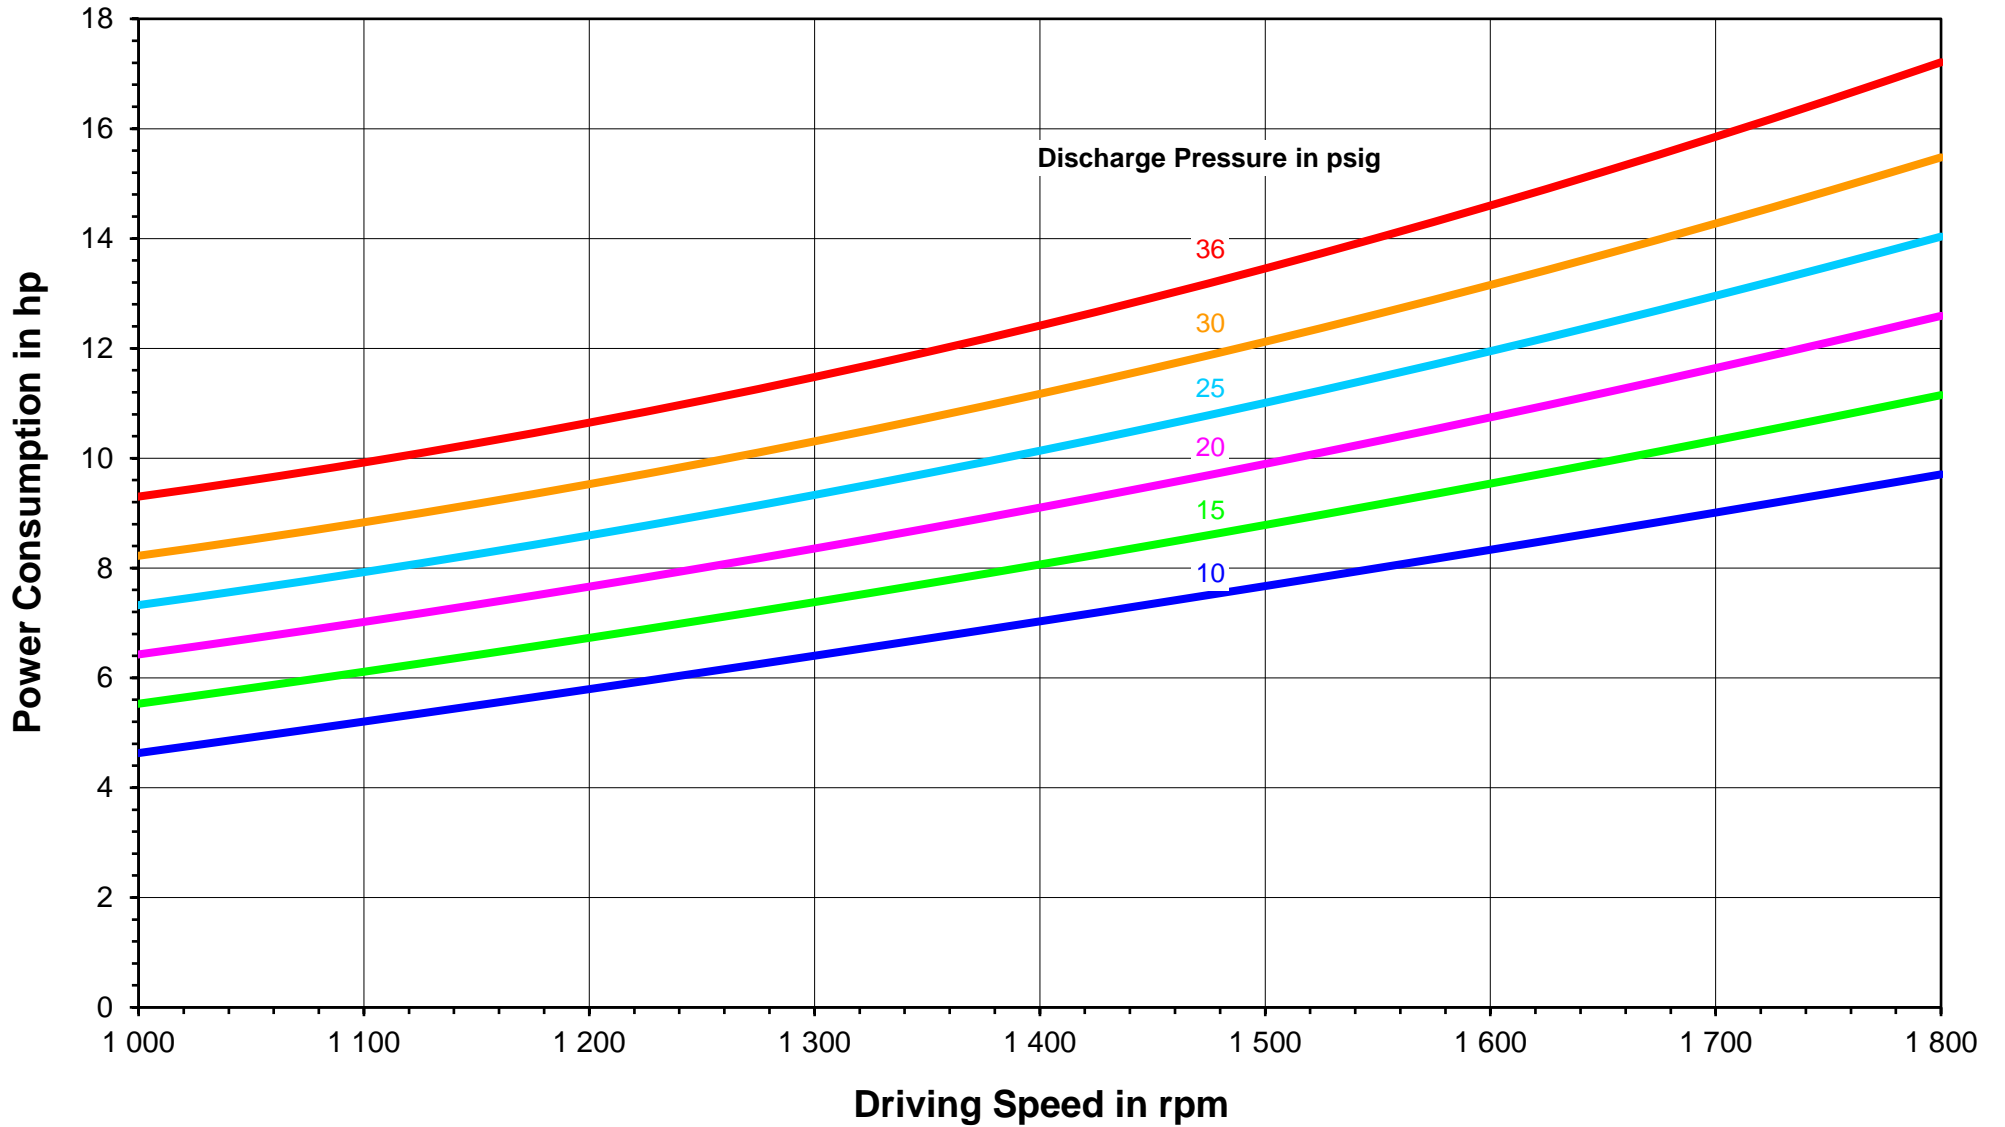


Medium: air, 14.504 psia, 68 °F, relative humidity 60 %

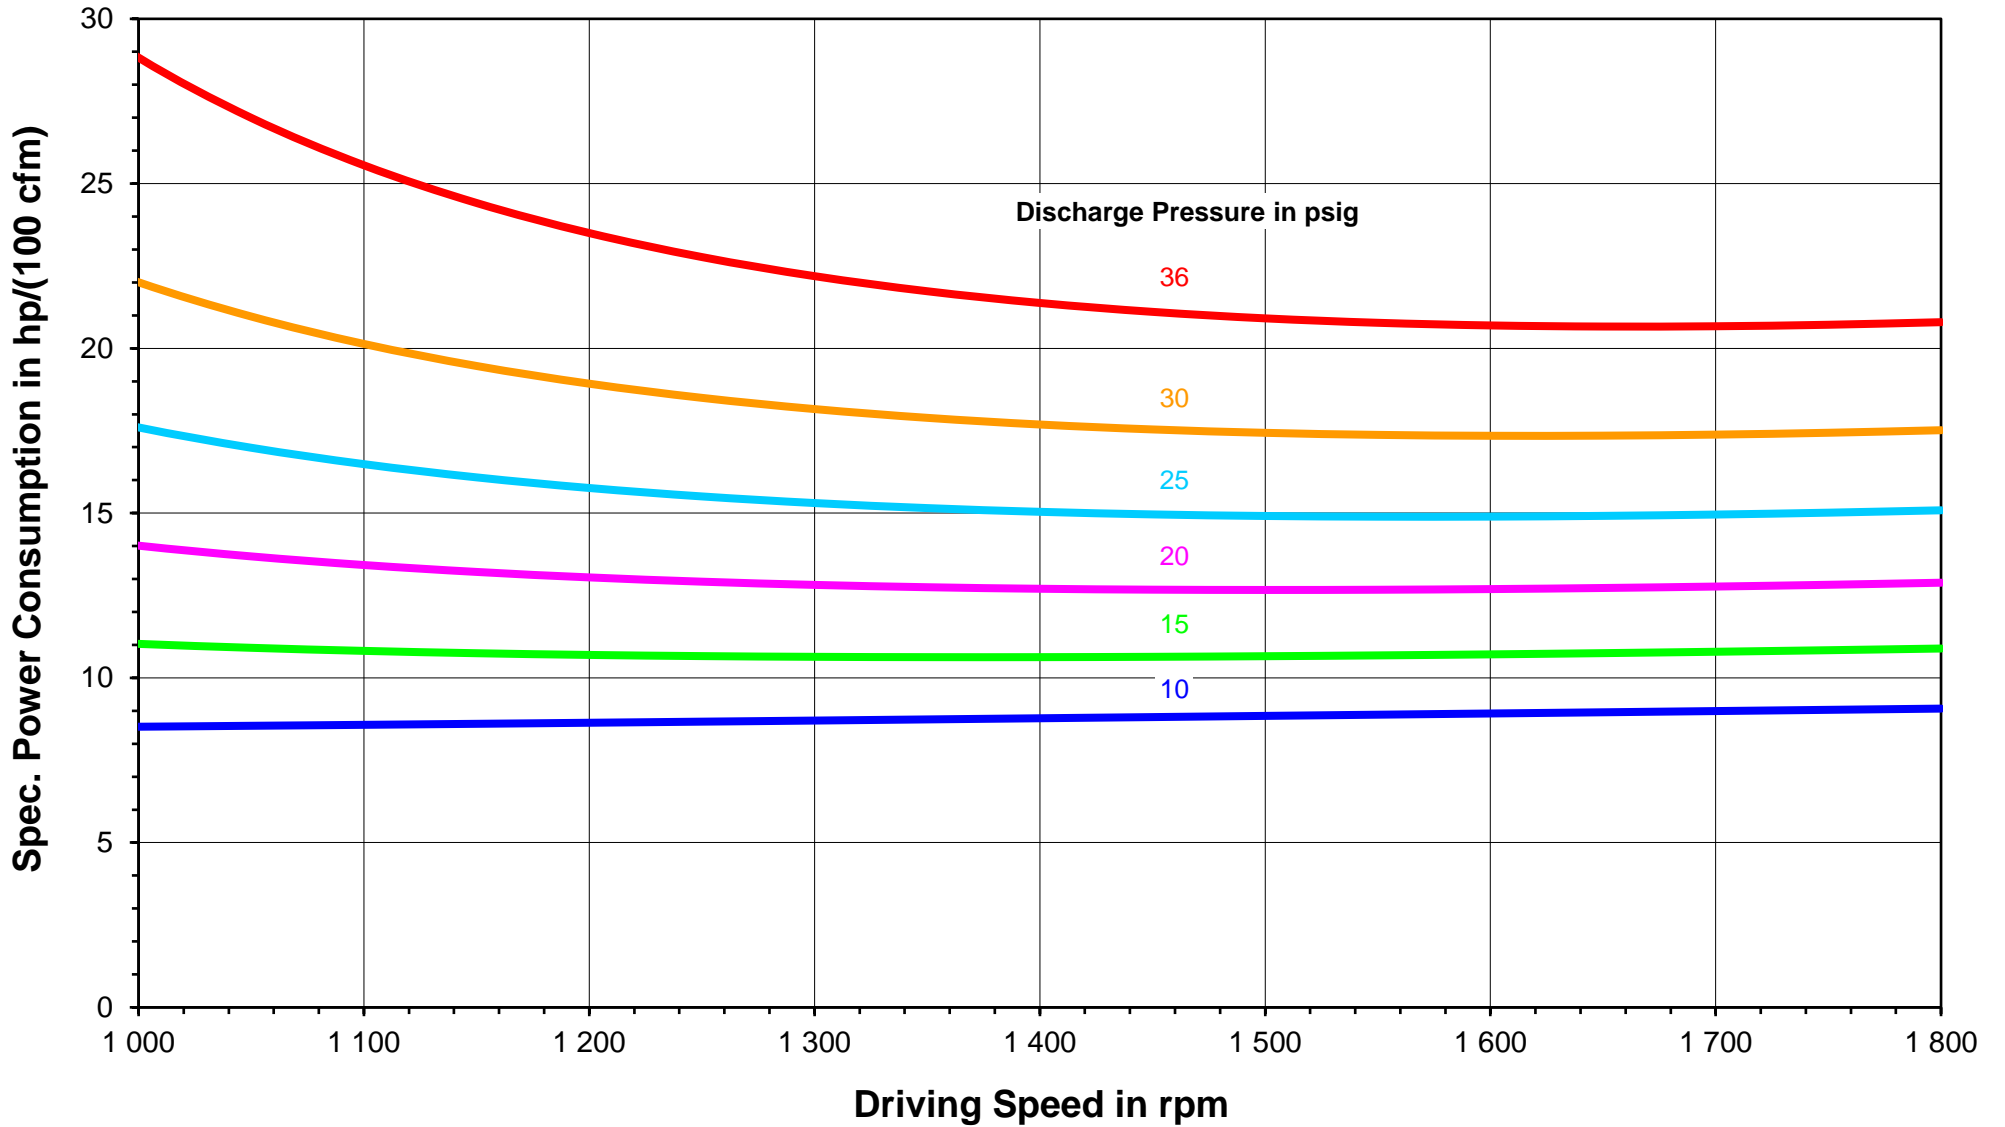

Medium: air, 14.504 psia, 68 °F, relative humidity 60 %

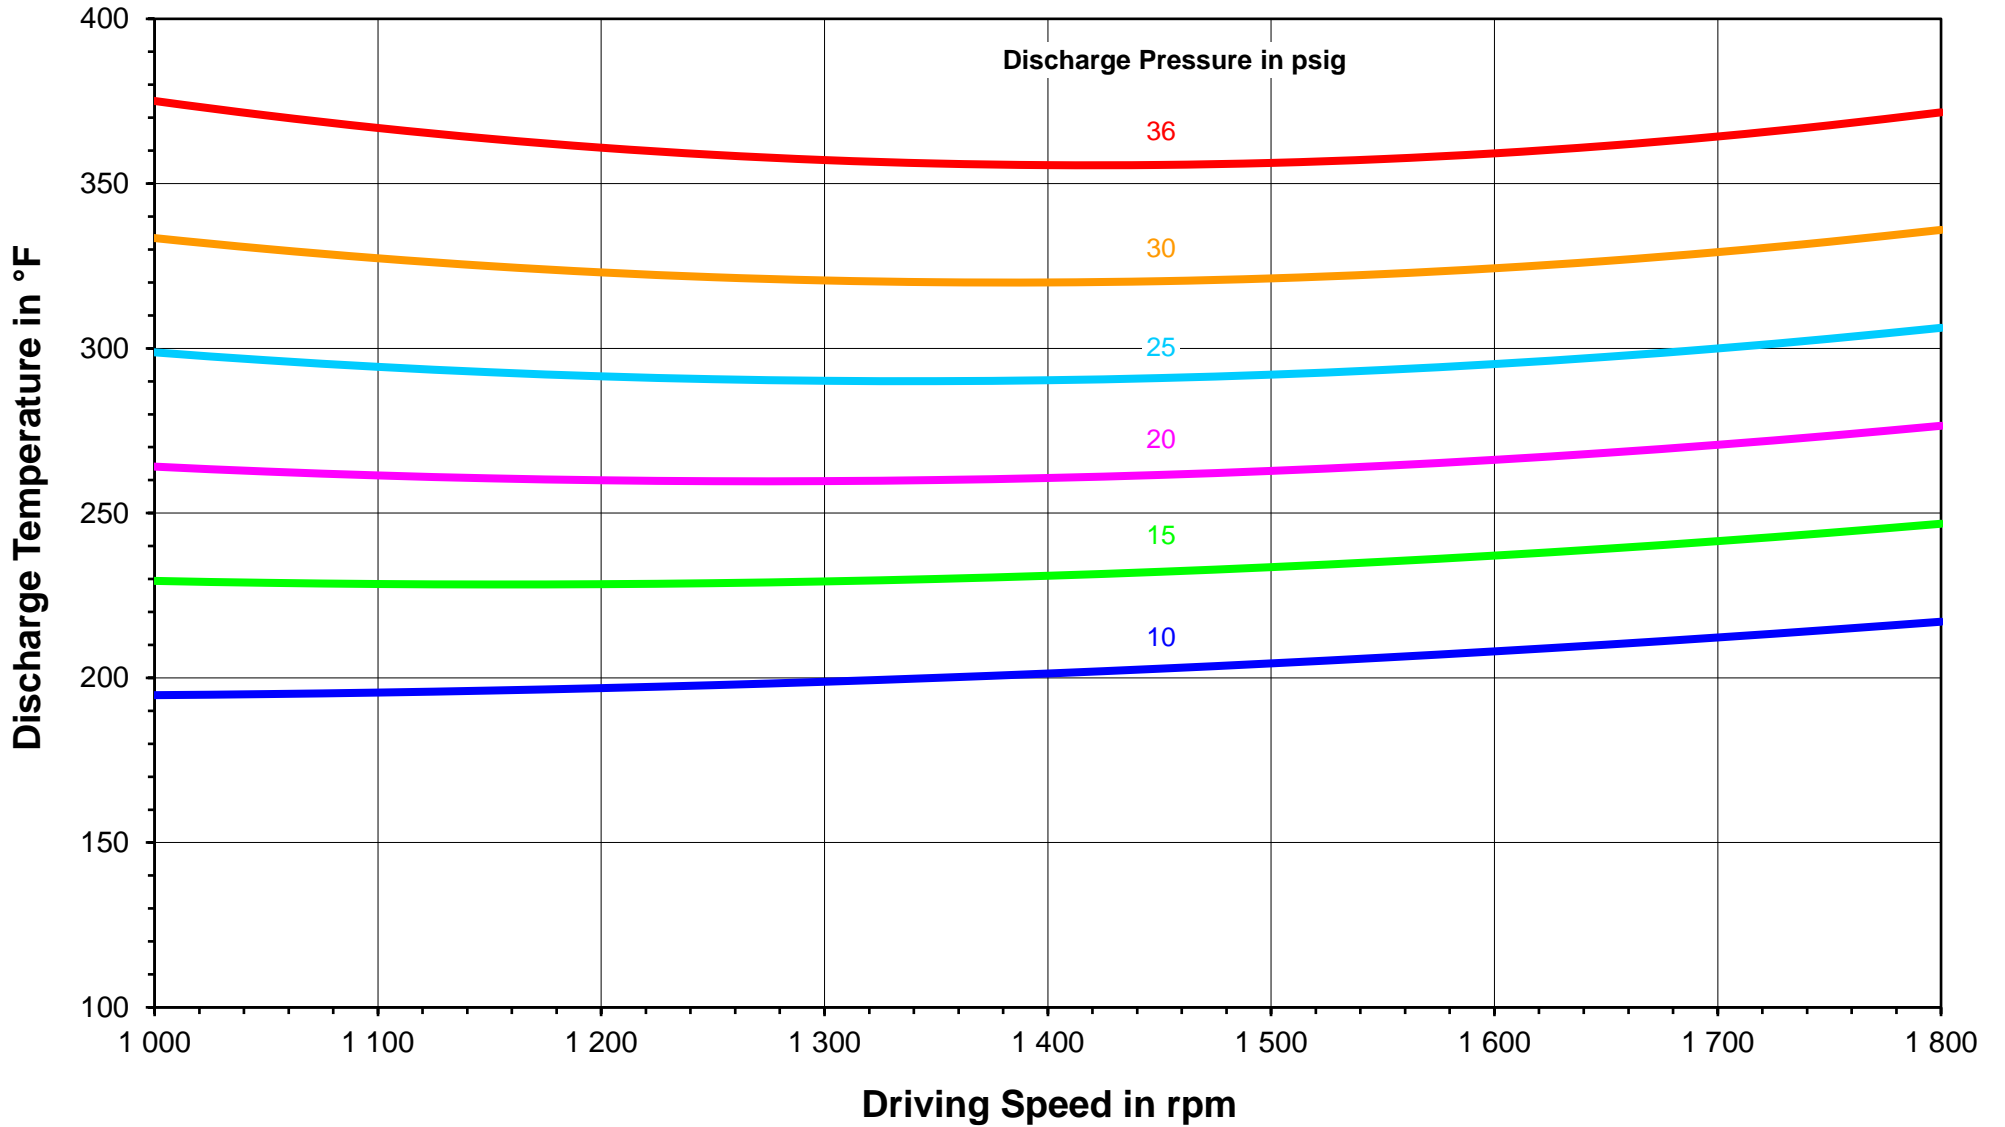

Medium: air, 14.504 psia, 68 °F, relative humidity 60 %

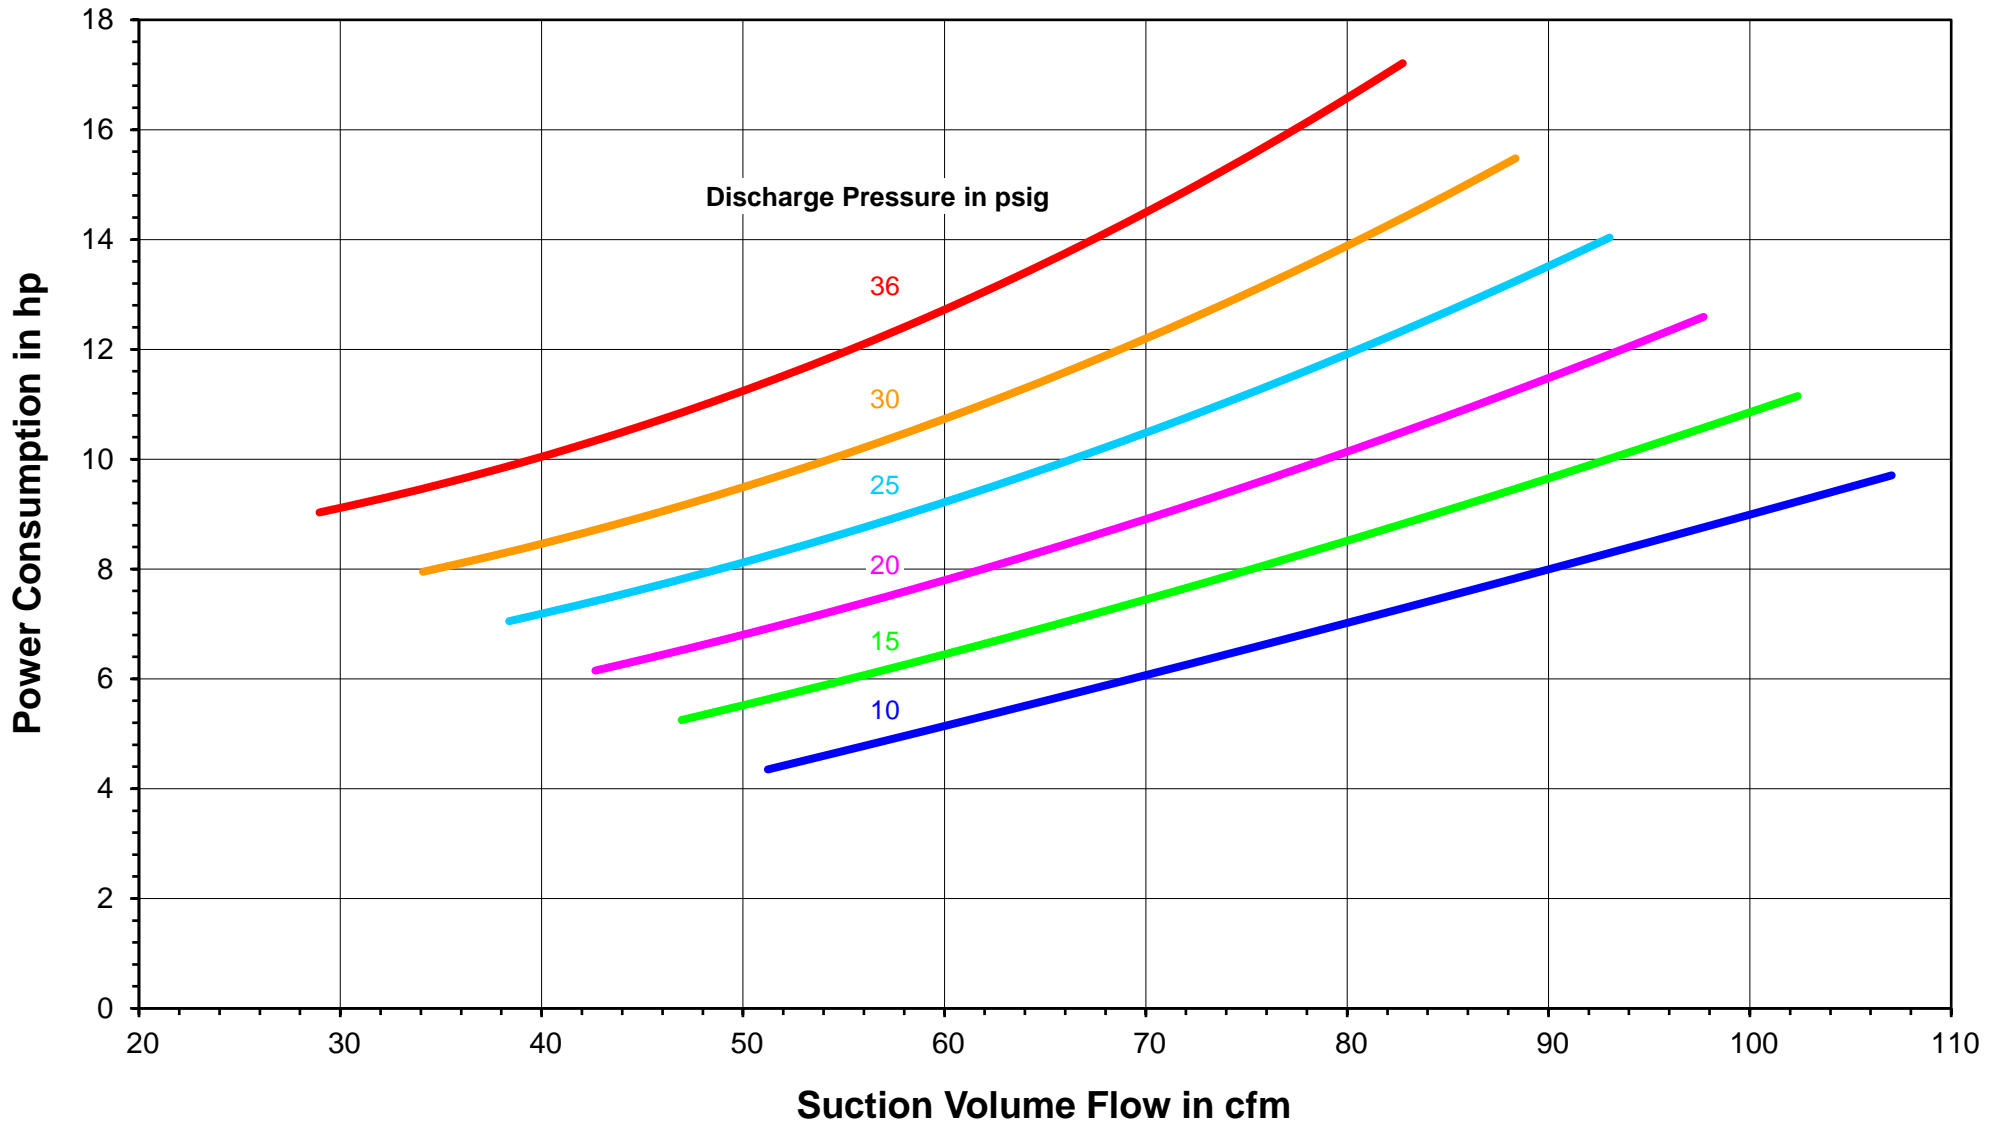

Medium: air, 14.504 psia, 68 °F, relative humidity 60 %

